

Type APM58

Automotive Blade Fuse

Miniature – Extended Voltage



www.optifuse.com

(619) 593-5050

Specifications:

- Voltage: 58V DC
- Amperage: 2A, 3A, 4A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A, 35A
- Material: Body – Fiber Glass Reinforced Plastic, UL94V0 Flame Resistant
Metal – Copper, Zinc, Silver Alloy
- Interrupt Rating: 1000A @ 58VDC



Standards: According to SAE J2077



Part Number	Amperage	Body Color
APM58-2A	2A	Gray
APM58-3A	3A	Violet
APM58-4A	4A	Pink
APM58-5A	5A	Tan
APM58-7.5A	7.5A	Brown
APM58-10A	10A	Red
APM58-15A	15A	Blue
APM58-20A	20A	Yellow
APM58-25A	25A	Clear
APM58-30A	30A	Green
APM58-35A	35A	Purple

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
110%	>100h	
135%	750ms	1800s
200%	150ms	5s
350%	40ms	500 ms
600%	20ms	100ms

Mechanical Dimensions: Inches [mm]

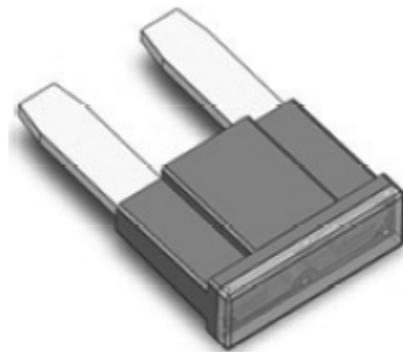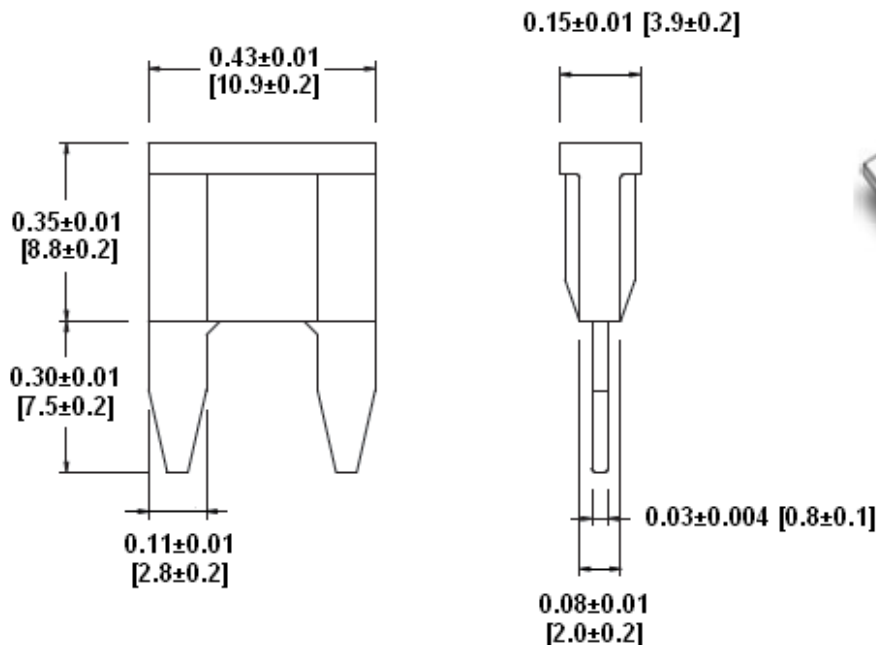

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev A 11/2009 - Page: 1/1
Code G02-01H