
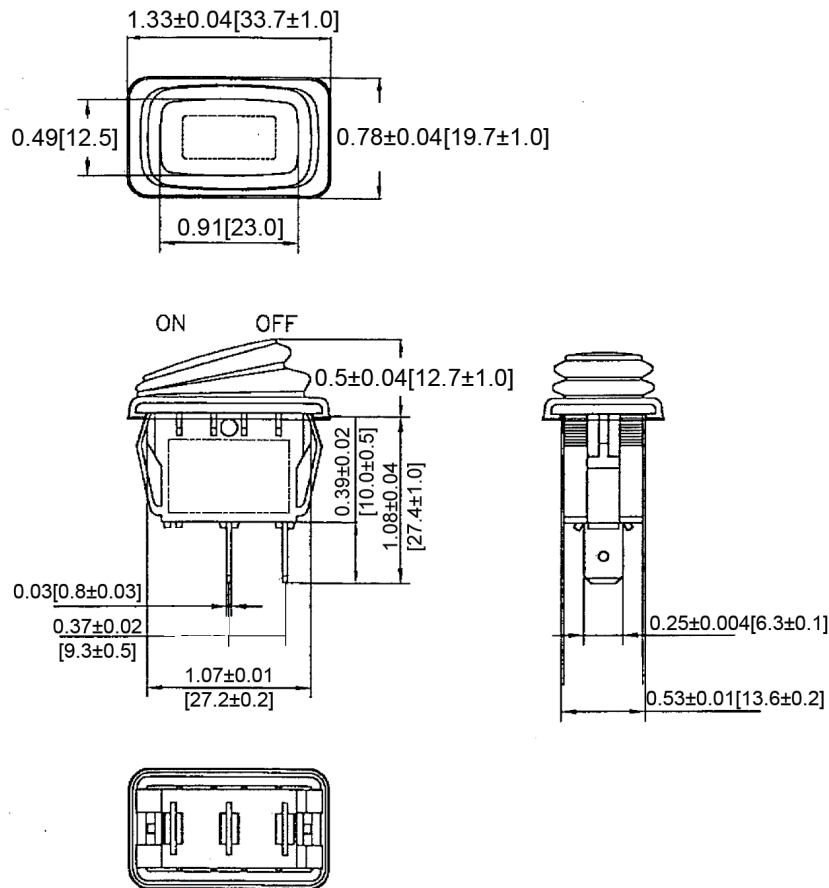


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified


Mounting Hole



Thickness	X	Y
0.03~0.1 [0.75~2.5]	1.09 [27.6-0.1]	0.5 [13.8+0.1]
0.1~0.14 [2.5~3.5]	1.09 [27.8-0.1]	0.5 [13.8+0.1]
0.14~0.18 [3.5~4.5]	1.10 [28.0-0.1]	0.5 [13.8+0.1]

Circuit Diagram

2P SPST ON-OFF



Electrical Specifications

Rating	20A 125V AC 1/3HP, 16A 250V AC 1/2HP 16(4)A 125/250V AC 	Frame	Black, Nylon 66
Contact Resistance	50m ohm Max.	Actuator	Blue, Nylon#66+30%GF
Insulation Resistance	DC 500V 100M ohm Min.	Terminals	Silver Plated, Copper Alloy
Dielectric Strength	AC 1500V 1 minute		IP65
Operation Temperature	-25° C-85° C		

Rocker Switch

RE2-1A-AC-1-B



Rev Date of issue Revision Notes

Designed Approved

B	12-01-2021	Initial Drawing	RC	OF
---	------------	-----------------	----	----