
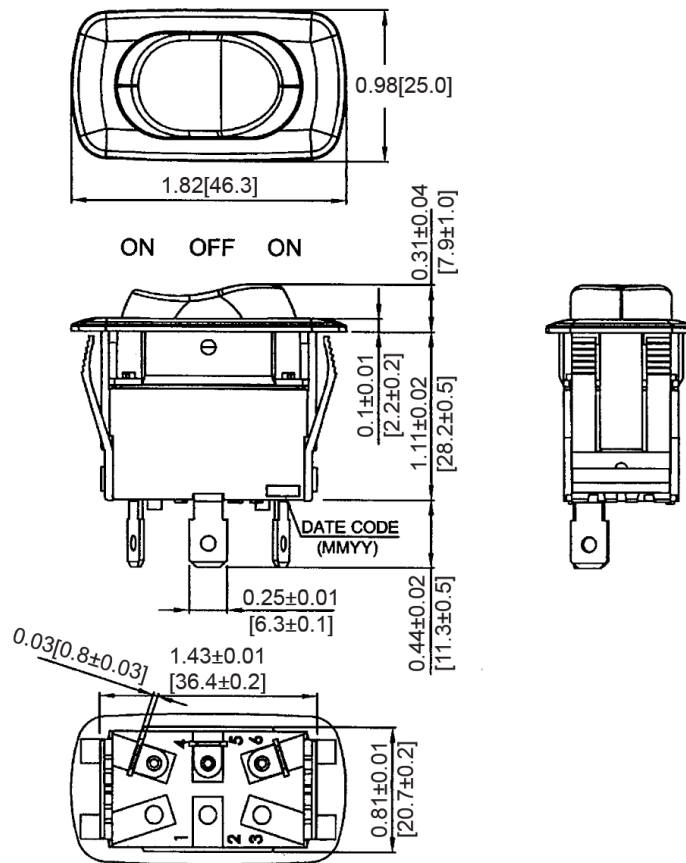


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified


Mounting Hole



Thickness	X	Y
0.03~0.05 [0.75~1.25]	0.83 ± 0.004 [21.2 ± 0.1]	1.44 ± 0.01 [36.6 ± 0.2]
0.05~0.08 [1.25~2.0]	0.83 ± 0.004 [21.2 ± 0.1]	1.45 ± 0.01 [36.8 ± 0.2]
0.08~0.12 [2.0~3.0]	0.83 ± 0.004 [21.2 ± 0.1]	1.46 ± 0.01 [37.0 ± 0.2]

Circuit Diagram

6P DPDT ON-OFF-ON



Electrical Specifications

Rating	16A 125VAC 10A 277VAC 3/4HP 16(4)A 125/250V AC 
Contact Resistance	50m ohm Max
Insulation Resistance	DC 500V 100M ohm Min
Dielectric Strength	AC 1500V 1minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon #66
Actuator	Black, Nylon #66
	IP-56

Rocker Switch

SRA1-1F-AC-1-NN



Rev Date of issue Revision Notes

Designed Approved

B	12-01-2021	Initial Drawing	RC	OF
---	------------	-----------------	----	----