



Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

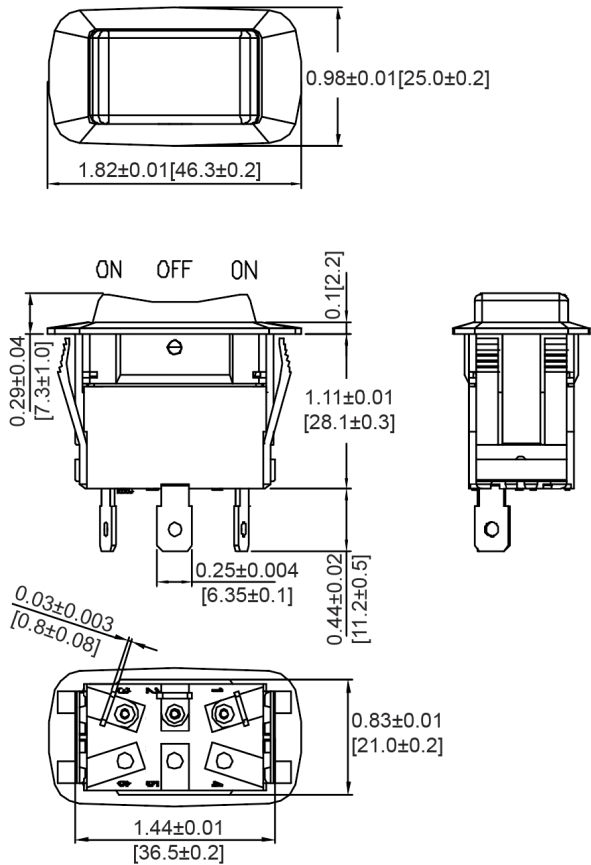


Mounting Hole



Thickness	X	Y
0.03~0.05[0.75~1.25]	0.83 ± 0.004 [21.2 $\pm$ 0.1]	1.44 ± 0.01 [36.6 $\pm$ 0.2]
0.05~0.1[1.25~2.0]	0.83 ± 0.004 [21.2 $\pm$ 0.1]	1.45 ± 0.01 [36.8 $\pm$ 0.2]
0.1~0.12[2.0~3.0]	0.83 ± 0.004 [21.2 $\pm$ 0.1]	1.46 ± 0.01 [37.0 $\pm$ 0.2]

Circuit Diagram

3P SPDT ON-OFF-ON



Electrical Specifications

Rating	16A 125VAC 10A 277VAC 3/4HP 16(4)A 125/250V AC
Contact Resistance	50m ohm Max
Insulation Resistance	DC 500V 100M ohm Min
Dielectric Strength	AC 1500V 1 minute

Material Specifications

Frame	Nylon #66, Black
Actuator	Nylon #66 +33%GF, Black
Waterproof Dustproof to fit	IP-56

Rocker Switch

SRB1-1F-AC-1-NN



Rev	Date of issue	Revision Notes	Designed	Approved
A	12-03-2021	Initial Drawing	RC	OF