




## Mechanical Dimensions: Inches [mm]

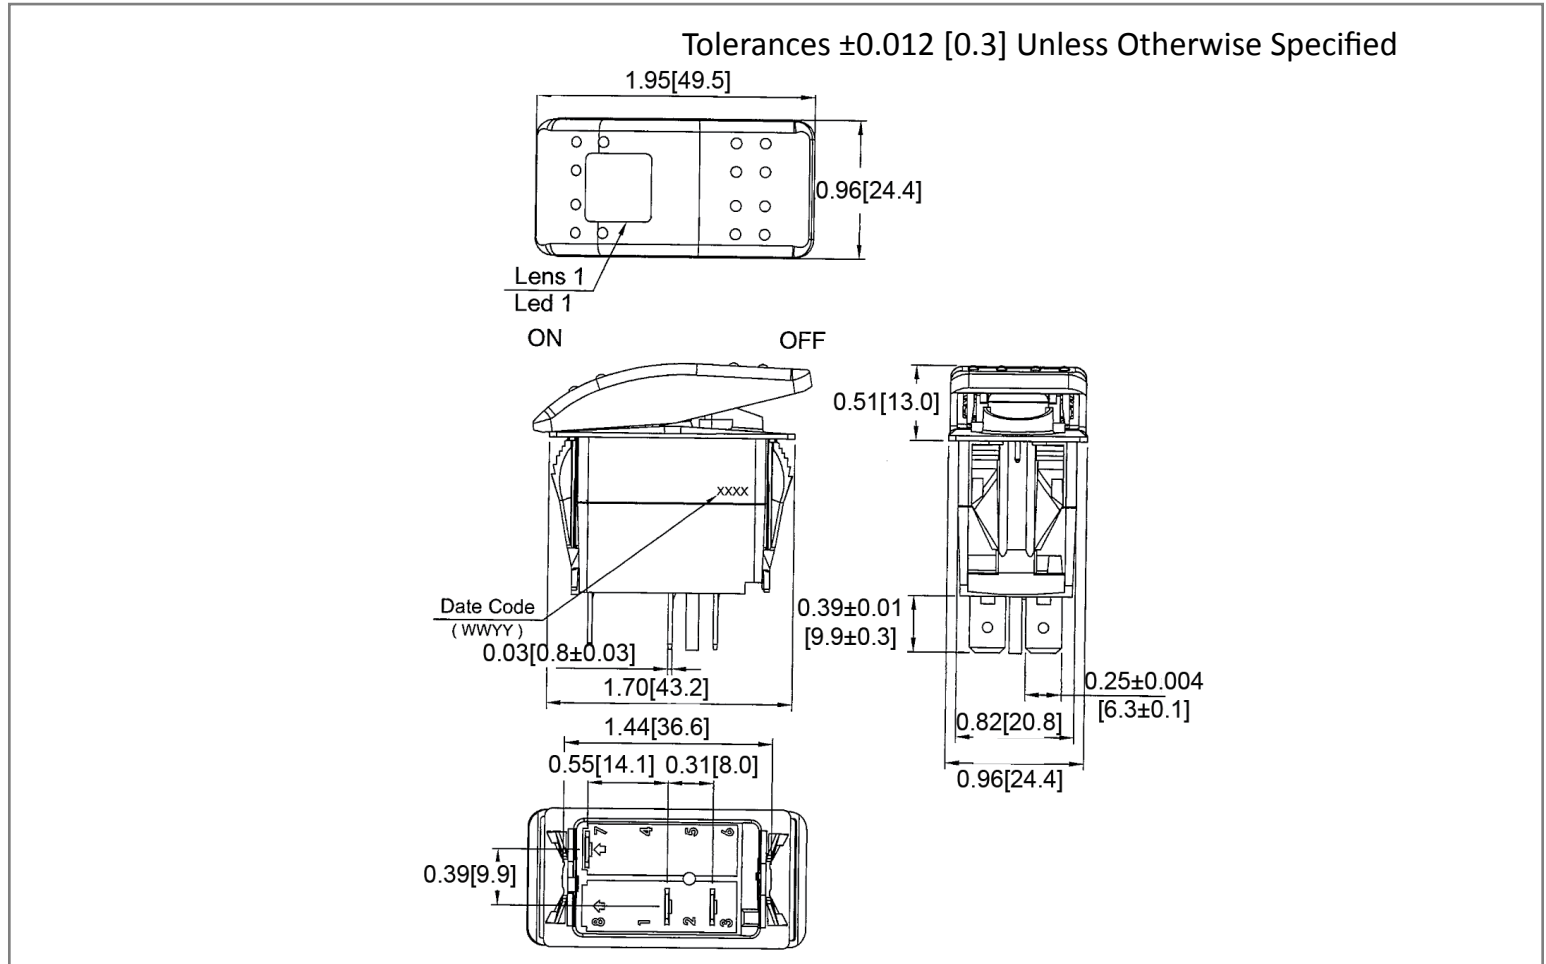

## Mounting Hole

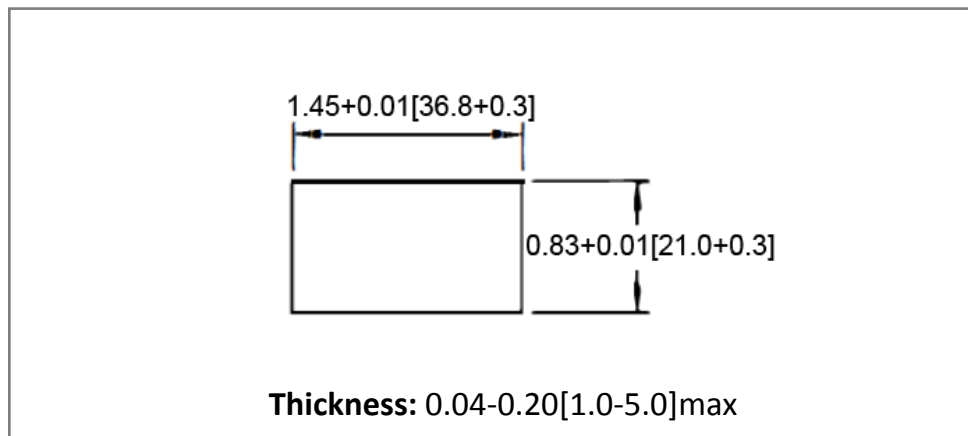

## Circuit Diagram

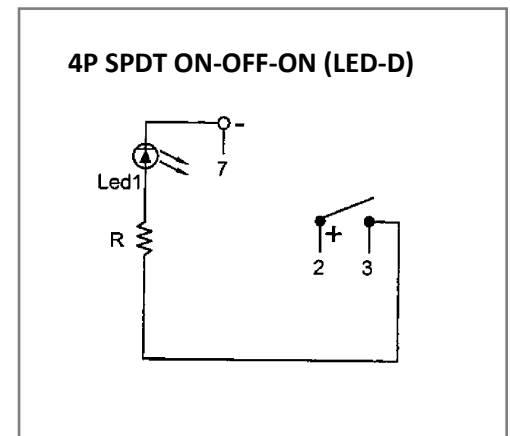

## Electrical Specifications

|                       |                       |
|-----------------------|-----------------------|
| Rating                | 21A 14V DC            |
| Contact Resistance    | 50m ohm Max.          |
| Insulation Resistance | DC 500V 100M ohm Min. |
| Dielectric Strength   | AC 1500V 1 minute     |
| Operation Temperature | -25°C~85°C            |

## Material Specifications

|                  |                              |
|------------------|------------------------------|
| Frame   Actuator | Black, Nylon 66 (94V-2)      |
| Lens             | White diffused, PC           |
| LED              | Amber (Dependent)            |
| Terminals        | Silver Plated Copper / Brass |
| Waterproof       | IP56                         |

**Rocker Switch**

**SRD1-1A-DC-1-BAN**



**Rev      Date of issue      Revision Notes**

**Designed      Approved**

|   |            |                 |    |    |
|---|------------|-----------------|----|----|
| B | 03-09-2020 | Initial Drawing | RC | OF |
|---|------------|-----------------|----|----|