




## Mechanical Dimensions: Inches [mm]

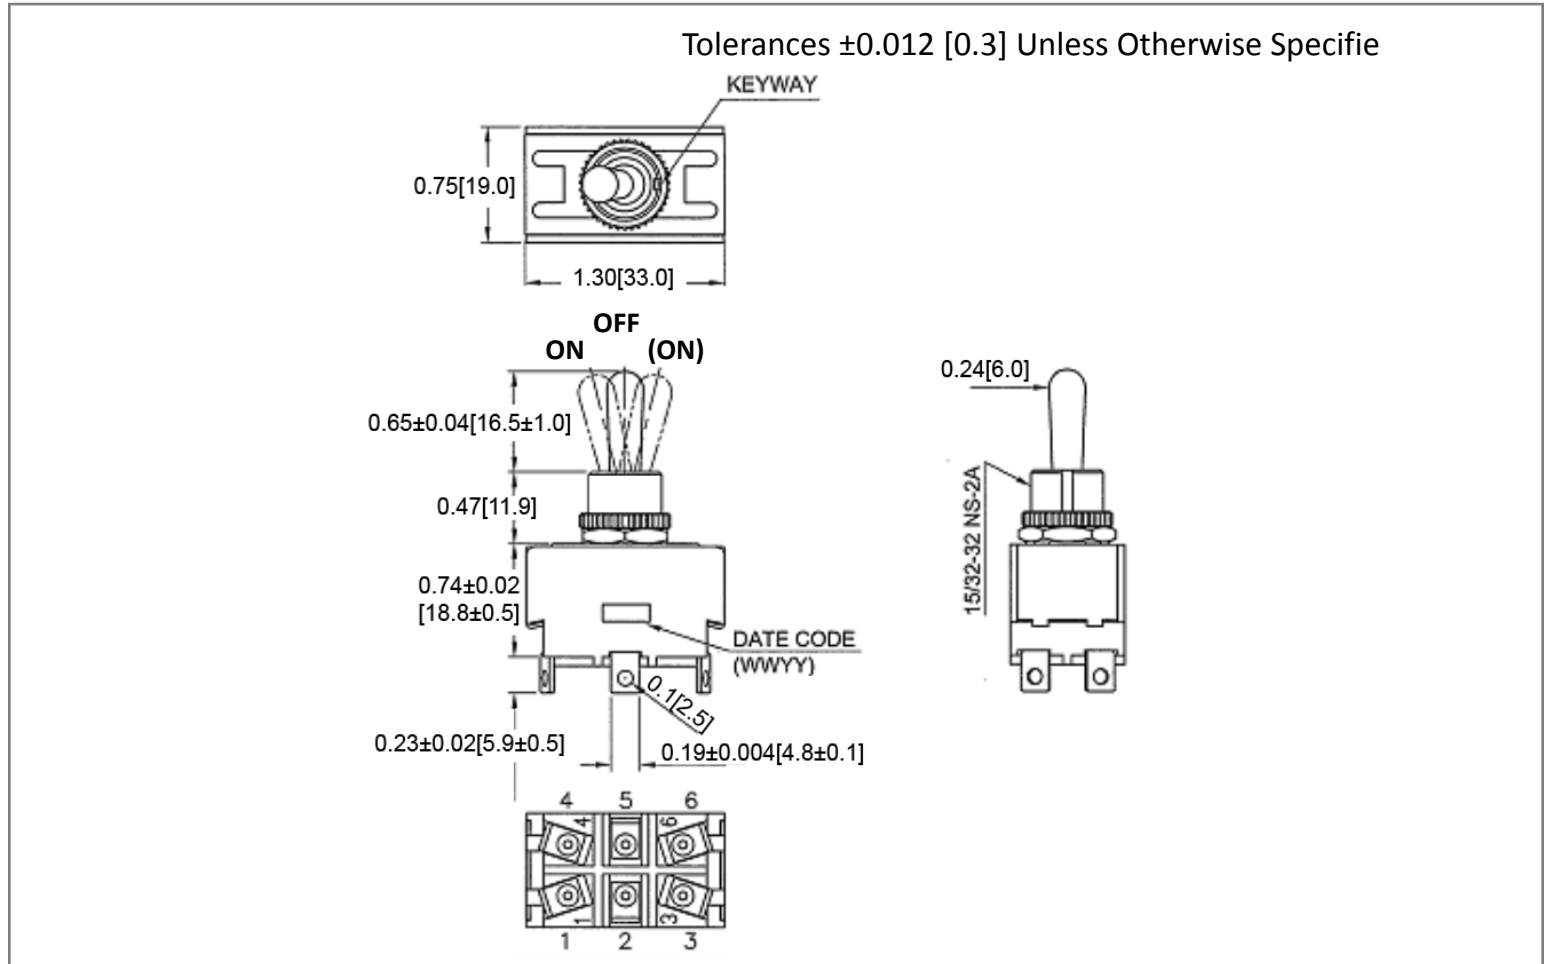

## Mounting Hole

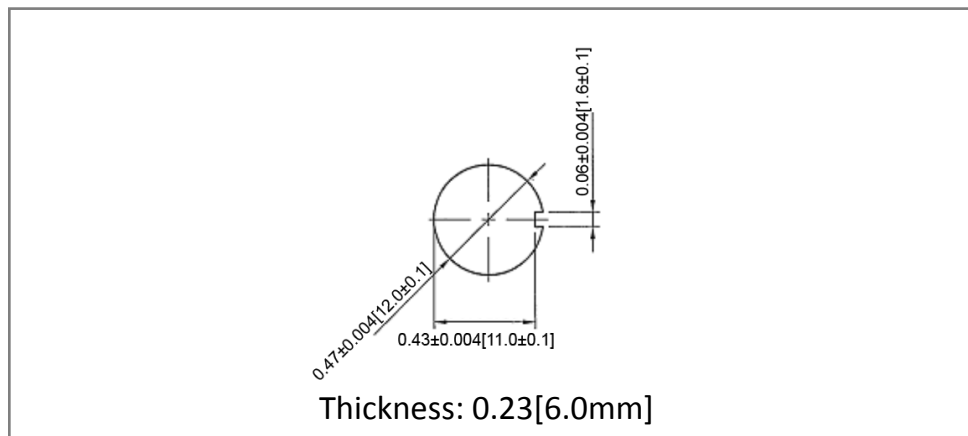

## Circuit Diagram

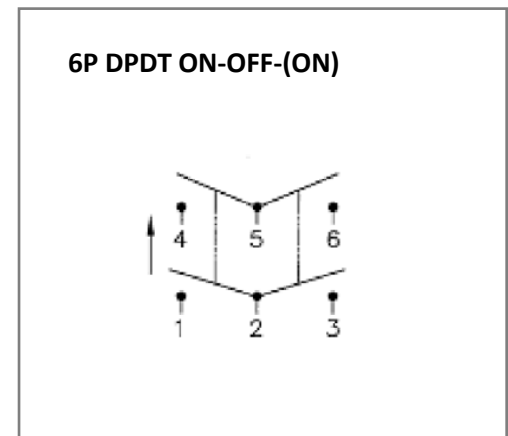

## Electrical Specifications

|                       |                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rating                | 20A 125V AC, 10A 277V AC, 1 1/2HP 125-250V AC<br>10(4)A 125/250V AC  |
| Contact Resistance    | 50m ohm Max                                                                                                                                             |
| Insulation Resistance | DC 500V 100M ohm Min                                                                                                                                    |
| Dielectric Strength   | AC 1500V 1 minute                                                                                                                                       |

## Material Specifications

|                 |                    |
|-----------------|--------------------|
| Operation Force | 1700gf $\pm$ 400gf |
|                 | 1 hex nut assy     |
|                 | 1 knurl nut assy   |

**Toggle Switch**

**TB1-2H-AC-5**



**Rev      Date of issue      Revision Notes**

**Designed      Approved**

|   |            |                |    |    |
|---|------------|----------------|----|----|
| B | 11-30-2021 | Initial Dawing | RC | OF |
|---|------------|----------------|----|----|