
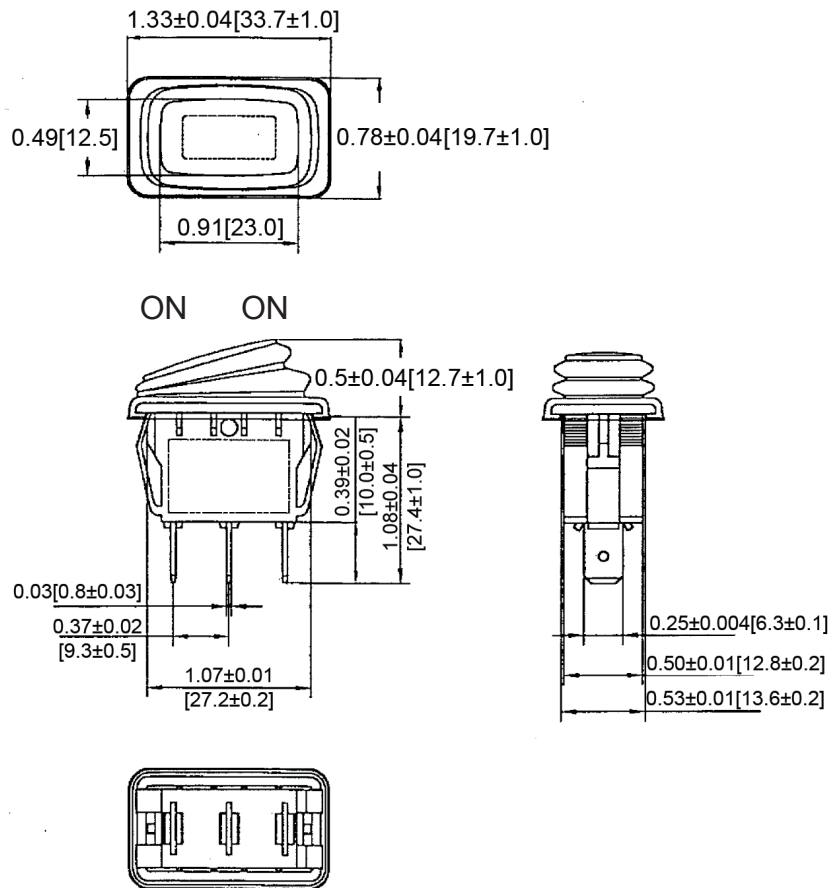


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified


Mounting Hole



Thickness	X	Y
$0.03 \sim 0.1$ [0.75 ~ 2.5]	1.09 [27.6 ~ 0.1]	0.5 [13.8 $\pm$ 0.1]
$0.1 \sim 0.14$ [2.5 ~ 3.5]	1.09 [27.8 ~ 0.1]	0.5 [13.8 $\pm$ 0.1]
$0.14 \sim 0.18$ [3.5 ~ 4.5]	1.10 [28.0 ~ 0.1]	0.5 [13.8 $\pm$ 0.1]

Circuit Diagram

3P SPDT ON-ON



Electrical Specifications

Rating 20A 125V AC 1/3HP, 16A 250V AC 1/2HP
16(4)A 125/250V AC 

Contact Resistance 50m ohm Max.

Insulation Resistance DC 500V 100M ohm Min.

Dielectric Strength AC 1500V 1 minute

Operation Temperature -25° C-85° C

Frame Black, Nylon 66

Actuator Blue, Nylon#66+30%GF

Waterproof Rubber Black, Silicone

Terminals Silver Plated, Copper Alloy

IP65

Rocker Switch

RE2-1D-AC-1-B



Rev Date of issue Revision Notes

Designed Approved

B	12-01-2021	Initial Drawing	RC	OF
---	------------	-----------------	----	----